

SHOWER

ZT7791

Colonna doccia completa di termostatico esterno. / Shower column with exposed thermostatic mixer.













Colonna doccia completa di termostatico esterno, soffione Ø 300 mm in ottone Z94266 e doccetta a 3 getti in ABS Z94731.

Water Saving - portata d'acqua uguale o inferiore a 9 l/min.

Shower column with exposed thermostatic mixer, Z94266 brass shower head Ø 300mm and Z94731 ABS handshower 3 jets.

Water Saving - water flow rate of 9 l/min or less.


Finiture / Finishes

 Croma / Chrome	 C3 Nickel Spazzolato / Brushed Nickel	 C8 Nickel Lucido / Polished Nickel	 C40 Oro / Gold	 C41 Oro spazzolato / Brushed Gold	 C50 Metal Black / Metal Black	 C51 Metal Black spazzolato / Brushed Metal Black
 W1 Bianco Opaco Goffrato / Embossed Matt White	 N1 Nero Opaco Goffrato / Embossed Matt Black	 N6 Nero opaco / Matt black				

SHOWER

ZT7791

Disegno Complessivo / Overall Drawing

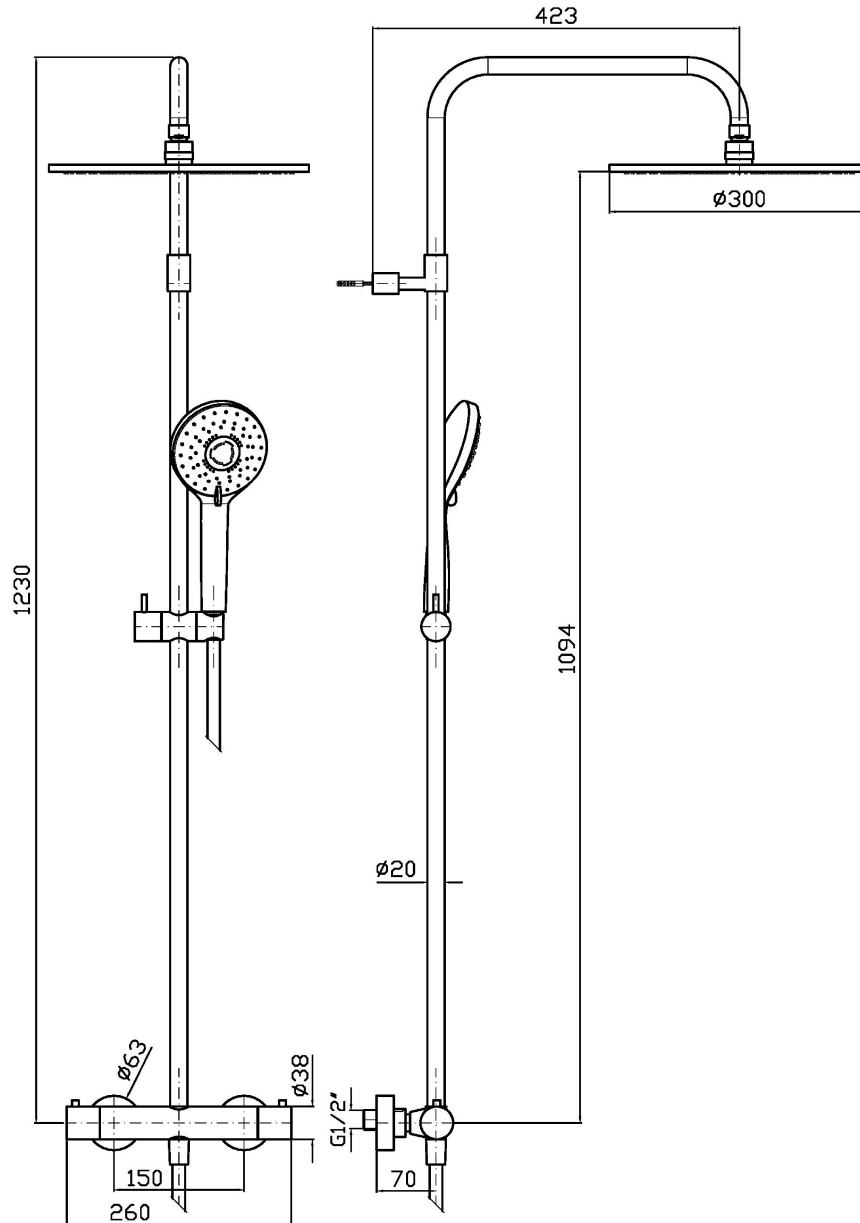


Note / Notes

SHOWER

ZT7791

Portate / Flowrates (lt/min)

PRESSIONE PRESSURE	1 BAR	2 BAR	3 BAR	4 BAR	5 BAR
P1 SOFFIONE SHOWER HEAD	8	9	9	9	9
P2 DOCCETTA HANDSHOWER	5,9	7,7	8,6	9	9
P3					
P4					
P5					

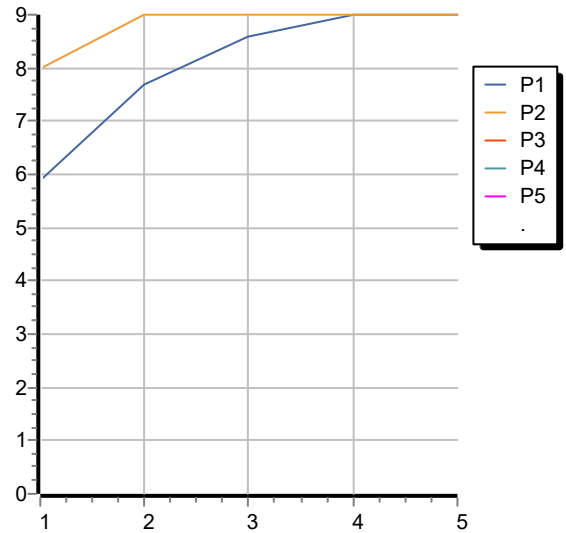

SHOWER

ZT7791

Pesi e Misure / Weights and Sizes

Peso (Kg) Weight (lb)	6,09 (Kg)	13,43 (lb)
Volume test (dc3) - (in3)	87,00 (dc3)	5309,06 (in3)
h (mm) - (in)	110,00 (mm)	4,33 (in)
L1 (mm) - (in)	430,00 (mm)	16,93 (in)
L2 (mm) - (in)	1180,00 (mm)	46,46 (in)

