

SHOWER

ZT7792

Colonna doccia completa di termostatico esterno. / Shower column with exposed thermostatic mixer.













Colonna doccia completa di termostatico esterno, soffione Ø 300 mm in ottone Z94266 e doccetta in ABS Z94727 a getto fisso.

Water Saving - portata d'acqua uguale o inferiore a 9 l/min.

Shower column with exposed thermostatic mixer, Z94266 brass shower head Ø 300mm and Z94727 ABS handshower simple jet.

Water Saving - water flow rate of 9 l/min or less.


Finiture / Finishes

						
Cromo / Chrome	Nickel Spazzolato / Brushed Nickel	Nickel Lucido / Polished Nickel	Oro / Gold	Oro spazzolato / Brushed Gold	Metal Black / Metal Black	Metal Black spazzolato / Brushed Metal Black
						
Bianco Opaco Goffrato / Embossed Matt White	Nero Opaco Goffrato / Embossed Matt Black	Nero opaco / Matt black				

SHOWER

ZT7792

Disegno Complessivo / Overall Drawing

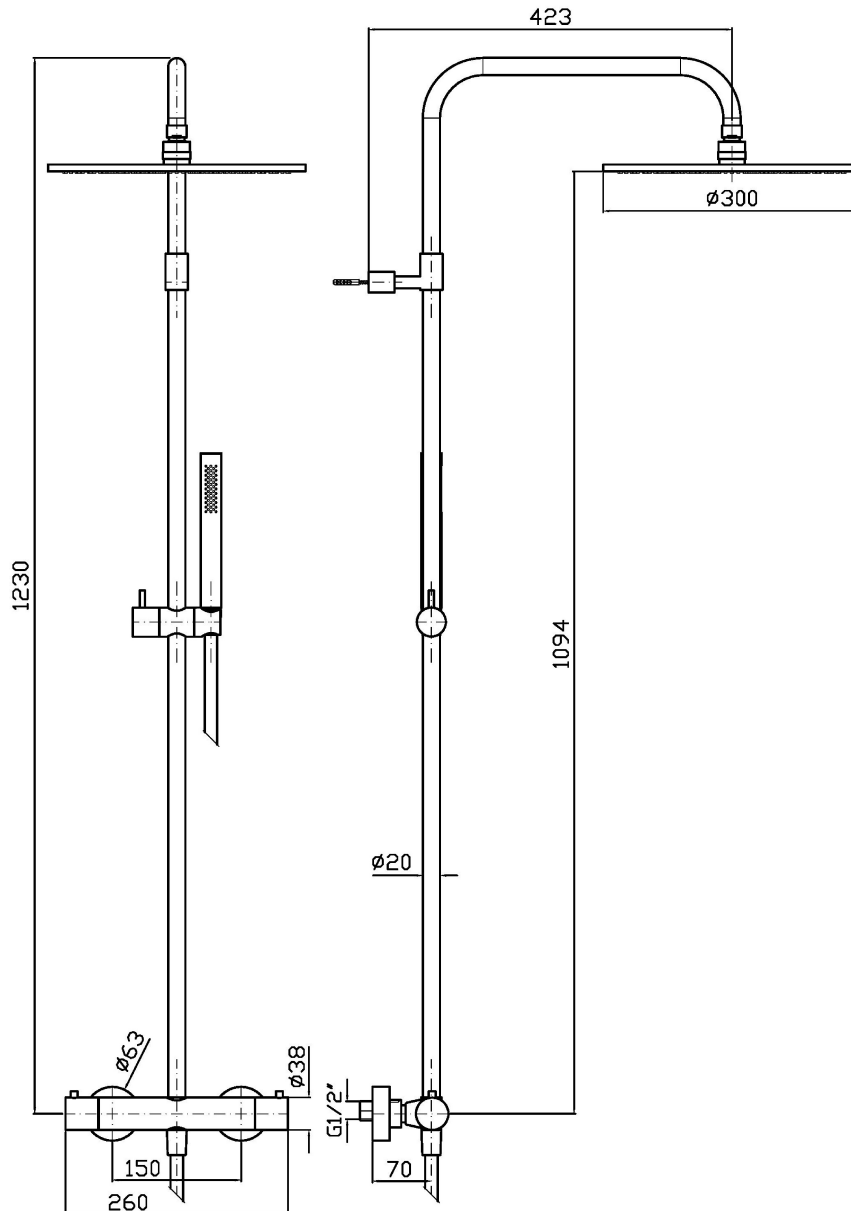


Note / Notes

SHOWER

ZT7792

Portate / Flowrates (lt/min)

PRESSIONE PRESSURE	1 BAR	2 BAR	3 BAR	4 BAR	5 BAR
P1 SOFFIONE SHOWER HEAD	8	9	9	9	9
P2 DOCCETTA HANDSHOWER	6,1	8,5	8,6	9	9
P3					
P4					
P5					

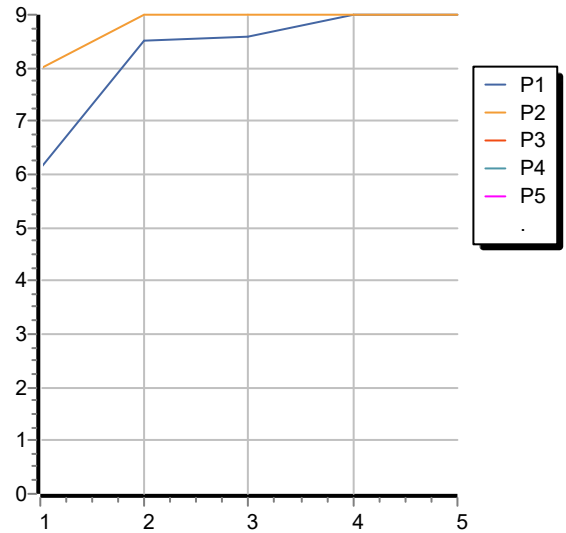

SHOWER

ZT7792

Pesi e Misure / Weights and Sizes

Peso (Kg) Weight (lb)	6,09 (Kg)	13,43 (lb)
Volume test (dc3) - (in3)	87,00 (dc3)	5309,06 (in3)
h (mm) - (in)	110,00 (mm)	4,33 (in)
L1 (mm) - (in)	430,00 (mm)	16,93 (in)
L2 (mm) - (in)	1180,00 (mm)	46,46 (in)

